

# Hot Connections, and ALL Connections


## Improve Critical / High Temp Connection Performance with **ANDERSON™ High Temp “AA” Oxidation Inhibitor Compound** **ANDERSON VS8-HTJC**



- **ACSS Class & “AA” Thermal Withstand Performance**
  - From -40° C thru +250° C Range, ANSI C119.4 specs
  - ACSS tested thru 250° C conductor range (225° C joint)
- **Unique New Synthetic Compound:**
  - Compatible w/ all utility equipment & surfaces
  - Conductive medium for “gritted” or “non-gritted” specs
  - Use on any fixed connector contact surface
- **Improved thermal and electrical junction performance:**
  - Compression Lugs & Splices; Distribution and Transmission
  - Tees, Taps & Stirrups on any conductor
  - Pad to Pad URD, Substation and Overhead connections
- **VS8-HTJC is different:**
  - I.S.O. “Hot Surface” ACSS Class recognition symbol
  - Specialty red cap & color theme highlights extreme range
  - Full info: label, bar coding, application and safety notes
- **Easy to Apply:**
  - 8 fl. oz. bottle for precise application. No waste.
  - Cleanup with soap and water.
- **In Any Environment**
  - Wet or Dry, Hot or Cold, VS8-HTJC gets the job done
  - Apply down to -40° C; and don't worry about summer!
- **2 Convenient Package Options:**
  - 12 pack in display-ready box
  - 16 oz. (wt.) Caulk Gun Tubes available as Cat. # HTJC-16



The widest selection of High Performance Inhibitor Compounds available to meet ANY need, anywhere

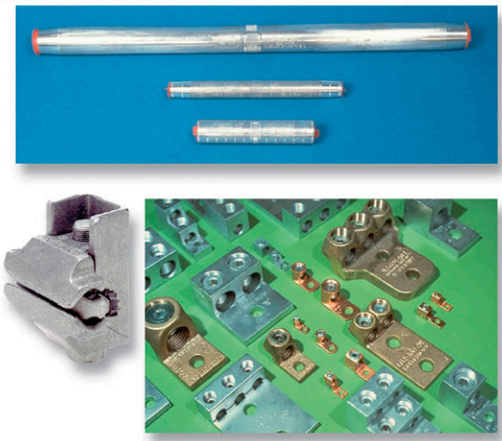

**Oxidation protection is easy; call Hubbell**



**POWER SYSTEMS, INC.**

E-mail: [hpsliterature@hps.hubbell.com](mailto:hpsliterature@hps.hubbell.com)  
Web: [www.hubbellpowersystems.com](http://www.hubbellpowersystems.com)

**ANDERSON™ CHANCE® FARGO® HUBBELL® OHIO/BRASS®**

Hubbell Power Systems, Inc. • 210 N. Allen St., Centralia, MO 65240 • Phone: 573-682-5521 • fax: 573-682-8714

Note: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.